


HYBRID

PVC BOULDER MAT WITH CARPET COVER



Hybrid is a connection of the best features of the mat in PVC cover as mat with extra independent carpet on top.

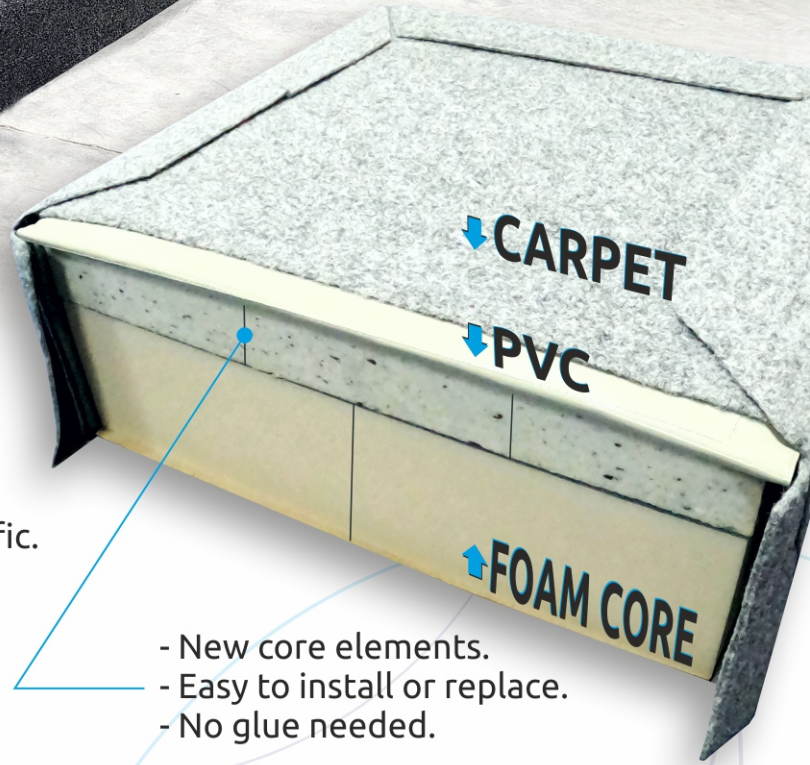

Characteristics:

- Model recommended for areas with heavy traffic.
- Durability of PVC mat core and no dust in the air thanks to the carpet.
- Available as:

- New core elements.
- Easy to install or replace.
- No glue needed.



Available versions:


- Thickness: 30cm or other on request
- Dimensions: according to clients enquiry



Fireproof Cfl-s1 carpet certification.

2m wide rolls of carpet easy to unfold.

Eighteen colours of the carpet to choose:

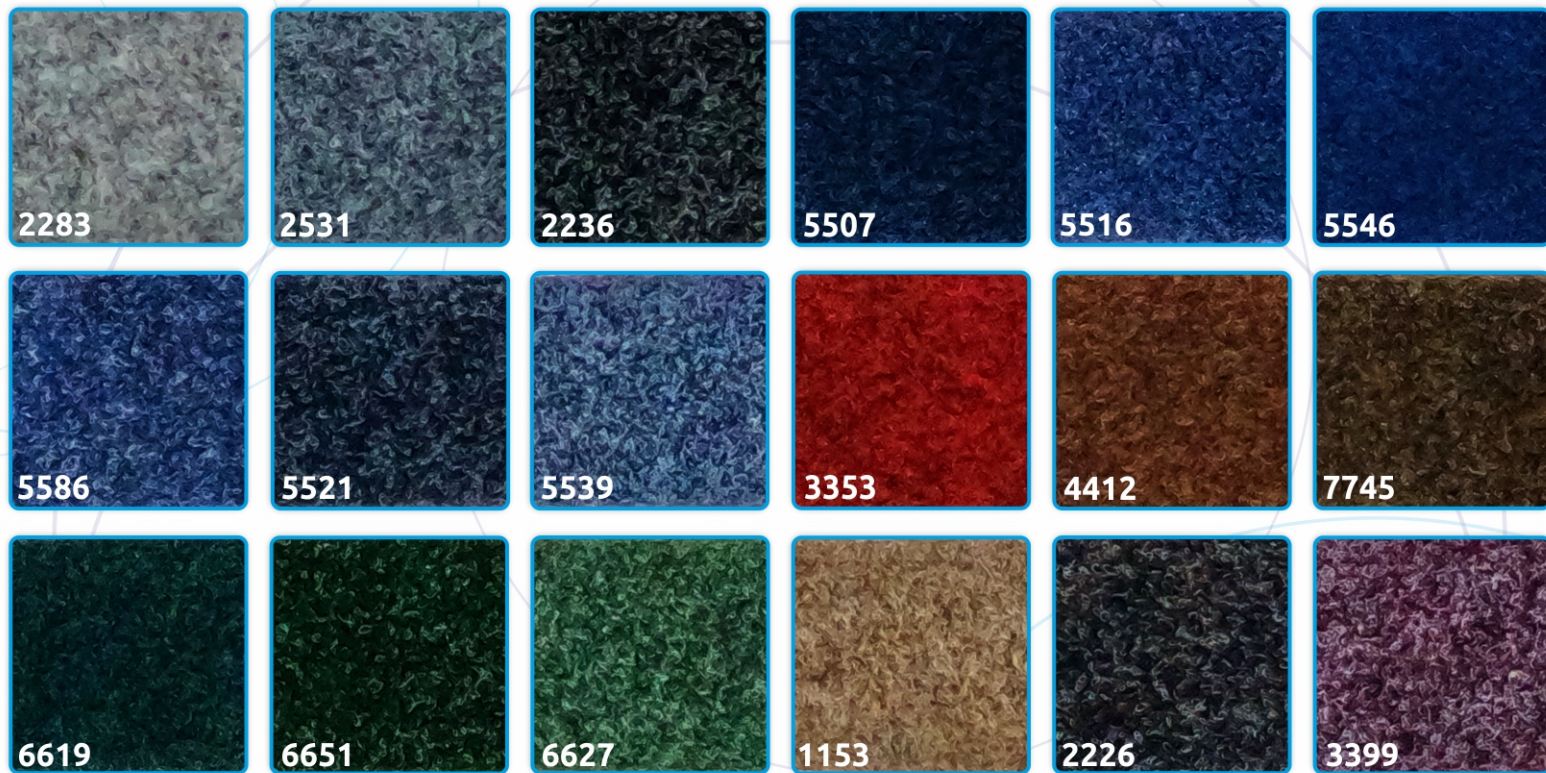


PRODUCT SHEET

Product code: MAC Hybrid v 2023 – Safety mat for boulder walls

Type of mat: Safety mat in PVC cover with extra carpet on top.

General characteristics of the construction and installation of the mat:

1. Mounting of PVC flaps with hook and loop tape fastened directly to the wall or screwed to the floor. ①
2. Corner flaps made of same carpet as top covering mounted to PVC flaps. ②
3. Mat core: consists of PU foam with a average density of 25 kg/m³ and RG foam with average density of 120 kg/m³. ③ Mat consists of two layers (bottom and top) joined together with hook and loop tape in a DIY system (glue is not required)
4. Entry area: harder foam, RG 140 kg/m³ for easier and stable entry onto the mat ④
5. Bottom corner flap made of the carpet, screw directly to the floor ⑤
6. PVC cover: Made of PVC material density min. 900 g/m² ⑥
Colour of PVC covering: Large range of colours available - colour to be agreed
7. Top layer made of carpet (in rolls) - width of each roll not more than 200 cm ⑦
8. Corner flaps made of same carpet as top covering mounted to bottom corner flaps and top carpet ⑧

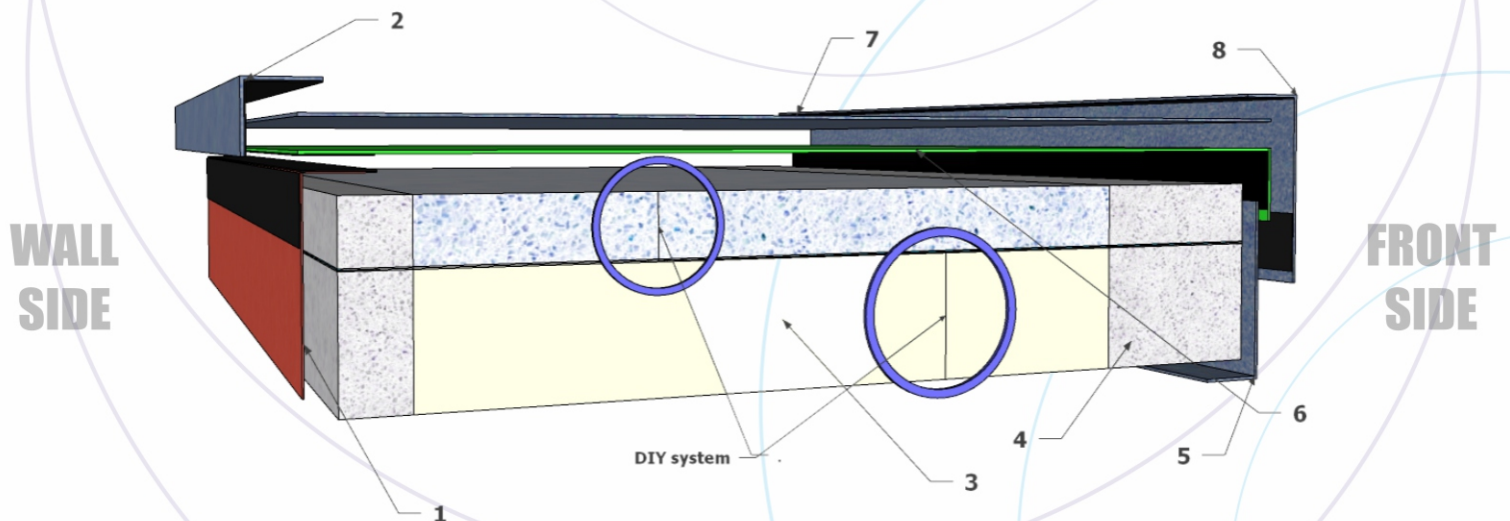

Note:

The wall must have space at right angle to the ground min. 3cm more than thickness of mat -to fit the mat there.

JOIN OUR FAMILY &
**ENJOY SPORTS
WITH US!**

Gymnastics:
Polkok
CHRZANÓW

Air Products:
Polkok
AIR

Martial Arts:
Polkok
FIGHT

Bouldering:
Polkok
PROTECHMAT

phone +48 32 642 37 47
mobile +48 509 244 745

polskok@polskok.com.pl
www.polskok.com.pl